Decorative Perforated Metal

Heanjia Super-Metals can produce a range of perforated metal sheets with thickness up to 3 mm. Diverse decorative hole shapes are perforated such as – round, square, triangle, diamond, oval, hexangular, slot etc.

Generally, it is recommended to use a hole size greater than a material thickness. The closer hole size and material thickness ratio 1:1 results into more difficult and costly process. On the base of kind of material, smaller hole size to material size ratio can be received.

We are equipped with automatic programming feeding system to expand our custom design options. Choosing the available patterns is more economical, however special hole shapes and sizes are also produced upon request.

Construction materials- Stainless steel grades 304, 316, Aluminum

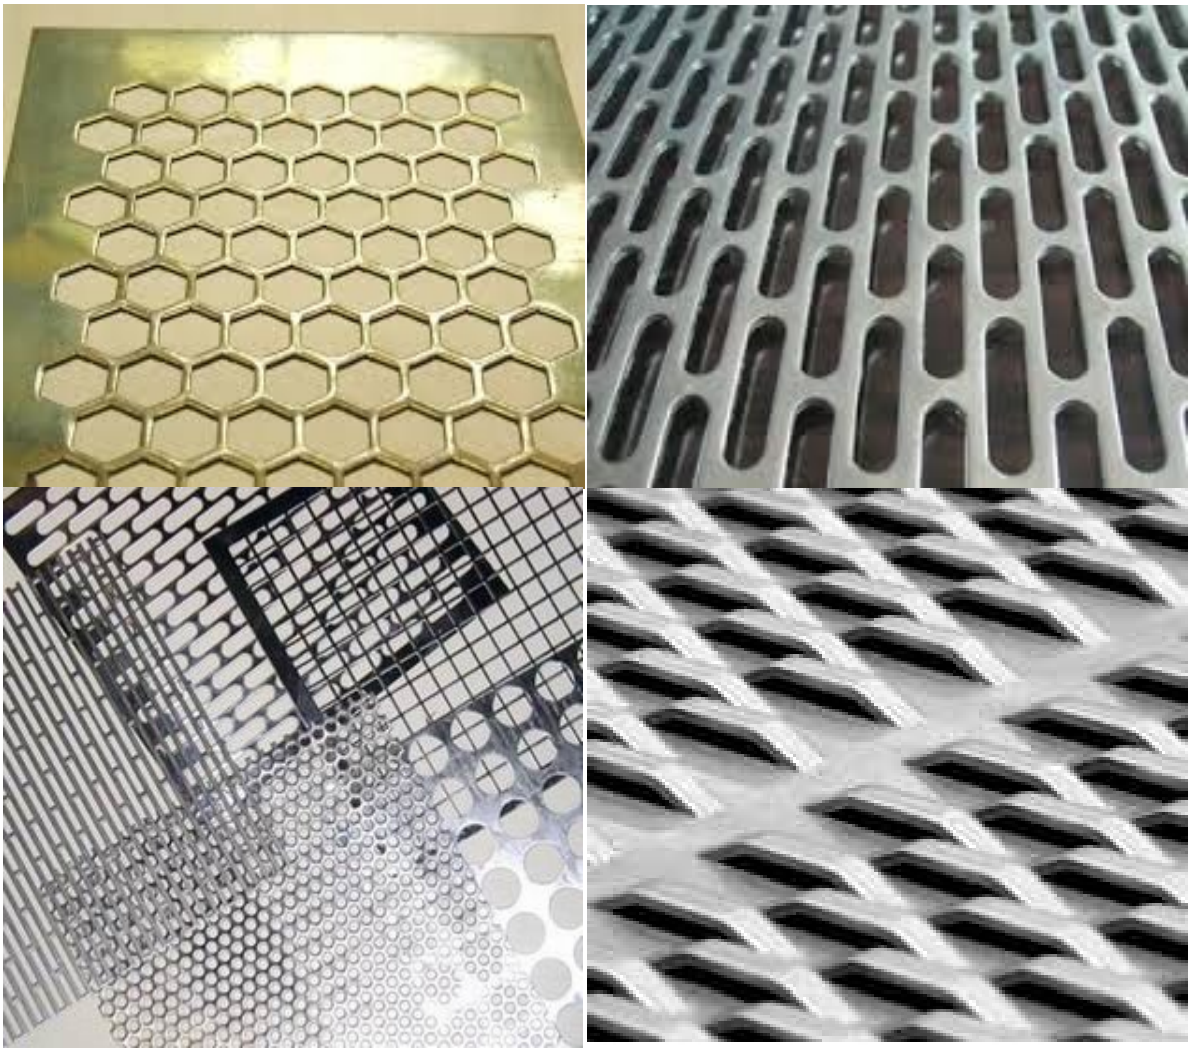

Hole designs- Round, Square, Triangle, Slot, hex, diamond and various special hole shapes.

Decorative Sheet Perforated Metal Stock

Material	Opening area %	Thickness	Dimension	Weight
Stainless steel	65.3	1 mm	1000 x 2000 mm	6.1 kg

Material	Opening area %	Thickness	Dimension	Weight
Stainless steel	56.5 %	1 mm	1000 x 2000 mm	7.3 kg
Stainless steel	56.5 %	1.50 mm	1000 x 2000 mm	10.7 kg
Stainless steel	56.5 %	2 mm	1000 x 2000 mm	14.3 kg
Stainless steel	46.3 %	1 mm	1000 x 2000 mm	8.8 kg
Stainless steel	46.3 %	2 mm	1000 x 2000 mm	17.5 kg
Stainless steel	46.3 %	1.50 mm	1000 x 2000 mm	13.2 kg
Stainless steel	46.3 %	3 mm	1000 x 2000 mm	9.1 kg
Stainless steel	56.5 %	1 mm	1000 x 2000 mm	7.3 kg
Stainless steel	56.5 %	1.50 mm	1000 x 2000 mm	10.7 kg
Stainless steel	56.5 %	2 mm	1000 x 2000 mm	14.3 kg
Stainless steel	42.2 %	1.50 mm	1000 x 2000 mm	14.2 kg
Stainless steel	42.2 %	2 mm	1000 x 2000 mm	18.7 kg
Stainless steel	42.2 %	2 mm	1500 x 3000 mm	42.1 kg
Stainless steel	42.2 %	3 mm	1000 x 2000 mm	28.3 kg
Stainless steel	42.2 %	4 mm	1000 x 2000 mm	38.1 kg
Stainless steel	42.2 %	5 mm	1000 x 2000 mm	47.6 kg
Stainless steel	33.5 %	10 mm	1000 x 2000 mm	110 kg
Stainless steel	47 %	3 mm	1000 x 2000 mm	27.4 kg
Stainless steel	49.8 %	1 mm	1000 x 2000 mm	8.8 kg
Stainless steel	49.8 %	1.50 mm	1000 x 2000 mm	13.1 kg
Stainless steel	49.8 %	2 mm	1000 x 2000 mm	16.6 kg
Stainless steel	49.8 %	2 mm	1250 x 2500 mm	27.5 kg
Stainless steel	49.8 %	2 mm	1500 x 3000 mm	37.7 kg
Stainless steel	49.8 %	4 mm	1000 x 2000 mm	33.1 kg
Stainless steel	49.8 %	5 mm	1000 x 2000 mm	42.5 kg
Stainless steel	49.8 %	1.50 mm	1000 x 2000 mm	12.8 kg
Stainless steel	49.8 %	2 mm	1000 x 2000 mm	17.5 kg
Stainless steel	49.8 %	1.50 mm	1000 x 2000 mm	13.1 kg
Stainless steel	49.8 %	2 mm	1000 x 2000 mm	16.6 kg
Stainless steel	49.8 %	2 mm	1250 x 2500 mm	25.7 kg
Stainless steel	49.8 %	2 mm	1500 x 3000 mm	37.7 kg
Stainless steel	46.3 %	2 mm	1000 x 2000 mm	17.5 kg
Stainless steel	46.3 %	2 mm	1250 x 2500 mm	27.7 kg
Stainless steel	46.3 %	3 mm	1000 x 2000 mm	26.4 kg
Stainless steel	46.3 %	5 mm	1000 x 2000 mm	44.9 kg
Stainless steel	46.3 %	2 mm	1000 x 2000 mm	17.5 kg
Stainless steel	46.3 %	2 mm	1250 x 2500 mm	27.2 kg
Stainless steel	46.3 %	2 mm	1000 x 2000 mm	17.5 kg
Stainless steel	46.3 %	2 mm	1000 x 2000 mm	10.8 kg
Stainless steel	46.3 %	2 mm	1500 x 3000 mm	13.7 kg
Stainless steel	51 %	2 mm	1250 x 2500 mm	26.2 kg
Stainless steel	7.1 %	1 mm	1000 x 2000 mm	14.9 kg
Stainless steel	7.1 %	1 mm	1250 x 2500 mm	23.3 kg
Stainless steel	7.1 %	1.50 mm	1000 x 2000 mm	22.4 kg

Material	Opening area %	Thickness	Dimension	Weight
Stainless steel	7.1 %	1.50 mm	1250 x 2500 mm	34.9 kg
Stainless steel	7.1 %	1.50 mm	1500 x 3000 mm	50.2 kg
Stainless steel	7.1 %	1.50 mm	1000 x 2000 mm	22.4 kg
Stainless steel	7.1 %	1.50 mm	1250 x 2500 mm	34.9 kg
Stainless steel	7.1 %	1.50 mm	1000 x 2000 mm	7.5 kg
Stainless steel	10 %	1 mm	1000 x 2000 mm	14.4 kg
Stainless steel	2.5 %	1.50 mm	1000 x 2000 mm	23.4 kg
Stainless steel	2.5 %	2 mm	1000 x 2000 mm	31.2 kg
Stainless steel	19.6 %	1 mm	1000 x 2000 mm	12.9 kg
Stainless steel	19.6 %	0.70 mm	1000 x 2000 mm	9 kg
Stainless steel	19.6 %	1 mm	1000 x 2000 mm	12.9 kg
Stainless steel	12.6 %	1.50 mm	1000 x 2000 mm	21.1 kg
Stainless steel	3.1 %	1 mm	1000 x 2000 mm	15.5 kg
Stainless steel	3.1 %	1.50 mm	1000 x 2000 mm	23.3 kg
Stainless steel	6.2 %	1.50 mm	1000 x 2000 mm	22.6 kg
Stainless steel	34.9 %	1.50 mm	1000 x 2000 mm	15.9 kg
Stainless steel	10.6 %	1 mm	1000 x 2000 mm	14.3 kg
Stainless steel	13.4 %	2 mm	1000 x 2000 mm	9.4 kg
Aluminum	11.4 %	2 mm	1000 x 2000 mm	9.6 kg
Aluminum	11.4 %	2 mm	1250 x 2500 mm	15 kg
Aluminum	39.3 %	1 mm	1000 x 2000 mm	9.8 kg
Aluminum	44.4 %	1 mm	1000 x 2000 mm	9.1 kg
Aluminum	44.4 %	1.50 mm	1000 x 2000 mm	13.6 kg
Aluminum	44.4 %	1 mm	1000 x 2000 mm	9.1 kg
Aluminum	44.4 %	1.50 mm	1000 x 2000 mm	13.6 kg
Aluminum	44.4 %	1 mm	1000 x 2000 mm	9.1 kg
Aluminum	44.4 %	1 mm	1000 x 2000 mm	3.1 kg
Aluminum	44.4 %	1.50 mm	1000 x 2000 mm	4.6 kg
Aluminum	51 %	1 mm	1000 x 2000 mm	7.9 kg
Aluminum	51 %	1.50 mm	1000 x 2000 mm	11.9 kg
Aluminum	51 %	1.50 mm	1000 x 2000 mm	4 kg
Aluminum	39.1 %	1 mm	1000 x 2000 mm	9.9 kg
Aluminum	39.1 %	1 mm	1250 x 2500 mm	15.4 kg
Aluminum	39.1 %	1.50 mm	1000 x 2000 mm	14.8 kg
Aluminum	39.1 %	1.50 mm	1250 x 2500 mm	23.1 kg
Aluminum	39.1 %	1.50 mm	1500 x 3000 mm	33.4 kg
Aluminum	39.1 %	2 mm	1000 x 2000 mm	19.8 kg
Aluminum	39.1 %	1 mm	1000 x 2000 mm	9.9 kg
Aluminum	39.1 %	1.5 mm	1000 x 2000 mm	14.9 kg
Aluminum	39.1 %	1.50 mm	1250 x 2500 mm	23.1 kg
Aluminum	39.1 %	2 mm	1000 x 2000 mm	19.9 kg
Aluminum	39.1 %	1 mm	1000 x 2000 mm	9.9 kg
Aluminum	39.1 %	1 mm	1250 x 2500 mm	15.4 kg
Aluminum	39.1 %	1.50 mm	1000 x 2000 mm	14.8 kg

Material	Opening area %	Thickness	Dimension	Weight
Aluminum	39.1 %	1.50 mm	1250 x 2500 mm	23.1 kg
Aluminum	39.1 %	2 mm	1000 x 2000 mm	19.8 kg
Aluminum	39.1 %	1 mm	1000 x 2000 mm	3.3 kg
Aluminum	39.1 %	2 mm	1000 x 2000 mm	6.7 kg
Aluminum	9.8 %	1 mm	1000 x 2000 mm	14.5 kg
Aluminum	33 %	1 mm	1000 x 2000 mm	10.8 kg
Aluminum	64 %	1 mm	1000 x 2000 mm	5.9 kg
Aluminum	64 %	1.50 mm	1000 x 2000 mm	8.9 kg
Aluminum	64 %	2 mm	1000 x 2000 mm	12 kg
Aluminum	64 %	1 mm	1000 x 2000 mm	6 kg
Aluminum	64 %	1 mm	1000 x 2000 mm	6 kg
Aluminum	64 %	1.50 mm	1000 x 2000 mm	9 kg
Aluminum	44.4 %	1 mm	1000 x 2000 mm	9 kg
Aluminum	44.4 %	1.50 mm	1000 x 2000 mm	13.5 kg
Aluminum	44.4 %	1.50 mm	1250 x 2500 mm	21.2 kg
Aluminum	44.4 %	1.50 mm	1500 x 3000 mm	30.5 kg
Aluminum	44.4 %	2 mm	1000 x 2000 mm	18 kg
Aluminum	44.4 %	2 mm	1250 x 2500 mm	28.3 kg
Aluminum	44.4 %	2 mm	1500 x 3000 mm	40.8 kg
Aluminum	44.4 %	1 mm	1000 x 2000 mm	9.1 kg
Aluminum	44.4 %	1.50 mm	1000 x 2000 mm	13.5 kg
Aluminum	44.4 %	2 mm	1000 x 2000 mm	18.1 kg
Aluminum	44.4 %	2 mm	1000 x 2000 mm	6.1 kg
Mild steel	7.3 %	1.50 mm	1000 x 2000 mm	22.3 kg
Mild steel	7.3 %	2 mm	1000 x 2000 mm	29.7 kg
Mild steel	11.1 %	2 mm	1000 x 2000 mm	9.6 kg
Mild steel	5.9 %	1.50 mm	1000 x 2000 mm	22.7 kg
Mild steel	50.8 %	1 mm	1000 x 2000 mm	8.1 kg
Mild steel	50.8 %	1 mm	1250 x 2500 mm	12.5 kg
Mild steel	50.8 %	1.50 mm	1000 x 2000 mm	12.1 kg
Mild steel	50.8 %	1.50 mm	1250 x 2500 mm	18.8 kg
Mild steel	50.8 %	1.50 mm	1500 x 3000 mm	27.9 kg
Mild steel	50.8 %	2 mm	1000 x 2000 mm	16.1 kg
Mild steel	50.8 %	2 mm	1250 x 2500 mm	25.1 kg
Mild steel	50.8 %	3 mm	1000 x 2000 mm	24.2 kg
Mild steel	50.8 %	3 mm	1250 x 2500 mm	37.8 kg
Mild steel	50.8 %	3 mm	1500 x 3000 mm	55.1 kg
Mild steel	50.8 %	1 mm	1000 x 2000 mm	8.1 kg
Mild steel	50.8 %	1.50 mm	1000 x 2000 mm	12.2 kg
Mild steel	50.8 %	2 mm	1000 x 2000 mm	16.2 kg
Mild steel	50.8 %	3 mm	1000 x 2000 mm	25.1 kg
Mild steel	50.8 %	1 mm	1000 x 2000 mm	8.1 kg
Mild steel	50.8 %	1 mm	1250 x 2500	12.5 kg
Mild steel	50.8 %	1.50 mm	1000 x 2000 mm	12.1 kg
Mild steel	50.8 %	1.50 mm	1250 x 2500 mm	18.8 kg

Material	Opening area %	Thickness	Dimension	Weight
Mild steel	50.8 %	2 mm	1000 x 2000 mm	16.1 kg