


Diamond Perforated Metal

Diamond Perforated metal is perfectly adaptable to offer astonishingly excellent design solutions, improving the look as well as functionality. The perforated materials offer better performance with holes that operate in several manners. Diamond perforated metal works ideally since the perforation process is extremely flexible to the designer's needs, material dimensions and shape of the end product.

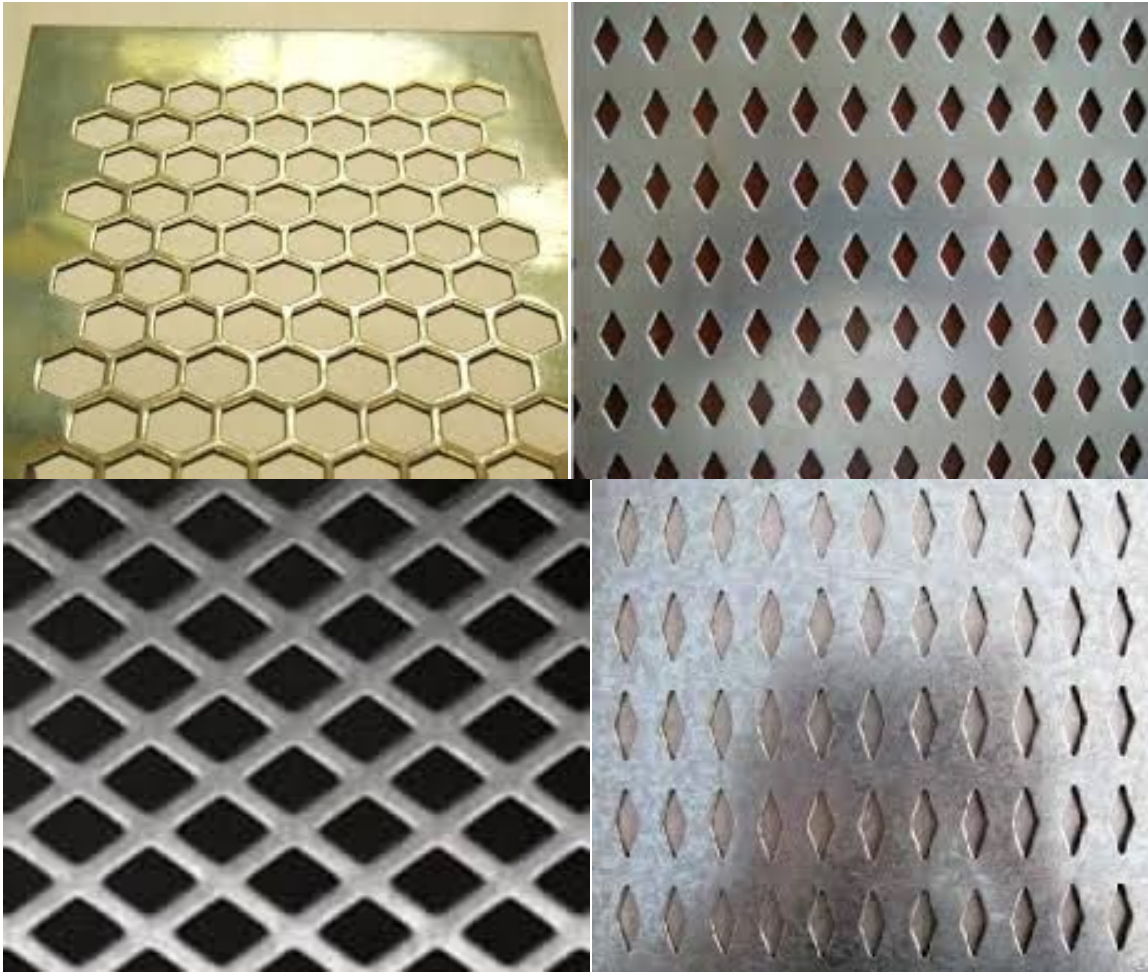

Heanjia Super-Metals can produce above 2000 perforation patterns, most of which are produced using our existing tooling. Because of the versatility of the tools and dies, it is impractical to show the possible patterns that can be produced. With the availability of extensive range of patterns that can be produced from our tools, it is likely to meet your requirements. In case we are unable to produce a pattern with our existing patterns, our staff will introduce the closest alternative to suit your needs.

Diamond Perforated Metal Applications

- Architecture Perforated Ceiling
- Screening Perforated Wall

Diamond Hole Perforated Metal Stock

Material	Opening area	Thickness	Dimension	Weight
SS 310	51 %	1 mm	1000 x 2000 mm	8 kg
SS 310	51 %	1.50 mm	1000 x 2000 mm	12 kg
SS 310	51 %	1.50 mm	1250 x 2500 mm	18.8 kg
SS 310	51 %	2 mm	1000 x 2000 mm	15.9 kg
SS 310	51 %	3 mm	1000 x 2000 mm	24.1 kg
SS 310	51 %	1 mm	1000 x 2000 mm	8 kg
SS 310	51 %	1.50 mm	1000 x 2000 mm	12 kg

Material	Opening area	Thickness	Dimension	Weight
SS 310	51 %	2 mm	1000 x 2000 mm	16.1 kg
SS 310	51 %	1 mm	1000 x 2000 mm	8 kg
SS 310	51 %	1 mm	1250 x 2500 mm	12.5 kg
SS 310	51 %	1.50 mm	1250 x 2500 mm	18.8 kg
SS 310	40.3 %	1 mm	1000 x 2000 mm	9.8 kg
SS 310	40.3 %	1.20 mm	1250 x 2500 mm	18 kg
SS 310	40.3 %	1.50 mm	1000 x 2000 mm	14.7 kg
SS 310	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
SS 310	40.3 %	2 mm	1000 x 2000 mm	19.5 kg
SS 310	40.3 %	2 mm	1250 x 2500 mm	30.4 kg
SS 310	40.3 %	3 mm	1000 x 2000 mm	19.2 kg
SS 310	40.3 %	3 mm	1250 x 2500 mm	45 kg
SS 310	40.3 %	3 mm	1500 x 3000 mm	66.1 kg
SS 310	40.3 %	4 mm	1000 x 2000 mm	39 kg
SS 310	40.3 %	5 mm	1000 x 2000 mm	49.5 kg
SS 310	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
SS 310	40.3 %	1.50 mm	1000 x 2000 mm	14.6 kg
SS 310	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
SS 310	40.3 %	1.50 mm	1500 x 3000 mm	32.7 kg
SS 310	40.3 %	2 mm	1000 x 2000 mm	19.5 kg
SS 310	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
SS 310	40.3 %	2 mm	1000 x 2000 mm	19.4 kg
Nickel	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
Nickel	40.3 %	1.50 mm	1000 x 2000 mm	14.6 kg
Nickel	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
Nickel	40.3 %	2 mm	1000 x 2000 mm	19.5 kg
Nickel	40.3 %	1.50 mm	1000 x 2000 mm	4.9 kg
Nickel	40.3 %	2 mm	1000 x 2000 mm	6.7 kg
Nickel	44.1 %	1 mm	1000 x 2000 mm	9.2 kg
Nickel	44.1 %	2 mm	1000 x 2000 mm	18.2 kg
Nickel	44.1 %	3 mm	1000 x 2000 mm	48 kg
Nickel	44.1 %	1 mm	1000 x 2000 mm	9.2 kg
Nickel	58 %	1 mm	1000 x 2000 mm	6.9 kg
Nickel	58 %	1.50 mm	1000 x 2000 mm	10.4 kg
Nickel	58 %	1 mm	1000 x 2000 mm	6.9 kg
Nickel	58 %	1.50 mm	1000 x 2000 mm	10.5 kg
Titanium	58 %	2 mm	1000 x 2000 mm	13.9 kg
Titanium	58 %	1.50 mm	1000 x 2000 mm	10.4 kg
Titanium	58 %	0.70 mm	1250 x 2500 mm	7.7 kg
Titanium	58 %	1 mm	1250 x 2500 mm	11 kg
Titanium	58 %	1.50 mm	1250 x 2500 mm	16.2 kg
Titanium	48 %	1 mm	1000 x 2000 mm	8.6 kg
Titanium	48 %	1.50 mm	1000 x 2000 mm	12.9 kg
Titanium	48 %	1.50 mm	1250 x 2500 mm	20.4 kg
Titanium	48 %	2 mm	1000 x 2000 mm	17.1 kg
Titanium	48 %	2 mm	1250 x 2500 mm	26.4 kg
Inconel 601	48 %	3 mm	1000 x 2000 mm	22.9 kg
Inconel 601	48 %	1 mm	1000 x 2000 mm	7.5 kg
Inconel 601	48 %	1.50 mm	1000 x 2000 mm	12.9 kg

Material	Opening area	Thickness	Dimension	Weight
Inconel 601	48 %	2 mm	1000 x 2000 mm	17.2 kg
Inconel 601	48 %	1 mm	1000 x 2000 mm	8.5 kg
Inconel 601	48 %	1.50 mm	1000 x 2000 mm	12.8 kg
Inconel 601	48 %	2 mm	1000 x 2000 mm	17.1 kg
Inconel 601	48 %	2 mm	1000 x 2000 mm	5.7 kg
Inconel 601	40.3 %	0.75 mm	1000 x 2000 mm	7.2 kg
Inconel 601	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
Inconel 601	40.3 %	1.50 mm	1000 x 2000 mm	14.6 kg
Inconel 601	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
Inconel 601	40.3 %	1.50 mm	1500 x 3000 mm	32.9 kg
Inconel 601	40.3 %	2 mm	1000 x 2000 mm	19.4 kg
Inconel 601	40.3 %	2 mm	1250 x 2500 mm	30.3 kg
Inconel 601	40.3 %	2 mm	1500 x 3000 mm	43.8 kg
Inconel 601	40.3 %	3 mm	1000 x 2000 mm	29.1 kg
Inconel 601	40.3 %	3 mm	1250 x 2500 mm	46.3 kg
Inconel 601	40.3 %	3 mm	1500 x 3000 mm	66.1 kg
Inconel 601	40.3 %	4 mm	1000 x 2000 mm	39.1 kg
Inconel 601	40.3 %	5 mm	1000 x 2000 mm	49.4 kg
Inconel 601	40.3 %	5 mm	1500 x 3000 mm	110.2 kg
Inconel 601	40.3 %	6 mm	1000 x 2000 mm	59.2 kg
Inconel 601	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
Inconel 625	40.3 %	1.50 mm	1000 x 2000 mm	14.3 kg
Inconel 625	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
Inconel 625	40.3 %	2 mm	1000 x 2000 mm	19.4 kg
Inconel 625	40.3 %	2 mm	1250 x 2500 mm	30.2 kg
Inconel 625	40.3 %	3 mm	1000 x 2000 mm	29.6 kg
Inconel 625	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
Inconel 625	40.3 %	1.50 mm	1000 x 2000 mm	14.8 kg
Inconel 625	40.3 %	2 mm	1000 x 2000 mm	19.7 kg
Inconel 625	40.3 %	3 mm	1000 x 2000 mm	29.6 kg
Inconel 625	40.3 %	6 mm	1000 x 2000 mm	60.3 kg
Inconel 625	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
Inconel 625	40.3 %	1.50 mm	1000 x 2000 mm	14.6 kg
Inconel 625	40.3 %	1.50 mm	1250 x 2500 mm	22.7 kg
Inconel 625	40.3 %	1.50 mm	1500 x 3000 mm	32.7 kg
Inconel 625	40.3 %	2 mm	1000 x 2000 mm	19.4 kg
Inconel 625	40.3 %	2 mm	1250 x 2500 mm	30.3 kg
Inconel 625	40.3 %	2 mm	1500 x 3000 mm	43.6 kg
Inconel 625	40.3 %	1 mm	1000 x 2000 mm	3.3 kg
Inconel 625	40.3 %	1.50 mm	1000 x 2000 mm	4.9 kg
Inconel 625	40.3 %	2 mm	1000 x 2000 mm	6.6 kg
Inconel 625	40.3 %	2 mm	1250 x 2500 mm	10.2 kg
Inconel 718	56.2 %	1 mm	1000 x 2000 mm	7.3 kg
Inconel 718	56.2 %	1.50 mm	1000 x 2000 mm	10.8 kg
Inconel 718	56.2 %	2 mm	1000 x 2000 mm	14.4 kg
Inconel 718	56.2 %	1 mm	1000 x 2000 mm	7.2 kg
Inconel 718	46.4 %	1 mm	1000 x 2000 mm	8.9 kg
Inconel 718	46.4 %	1 mm	1500 x 3000 mm	19.7 kg
Inconel 718	46.4 %	1.50 mm	1000 x 2000 mm	13.2 kg

Material	Opening area	Thickness	Dimension	Weight
Inconel 718	46.4 %	1.50 mm	1250 x 2500 mm	20.5 kg
Inconel 718	46.4 %	1.50 mm	1500 x 3000 mm	29.6 kg
Inconel 718	46.4 %	2 mm	1000 x 2000 mm	17.5 kg
Inconel 718	46.4 %	2 mm	1250 x 2500 mm	27.3 kg
Inconel 718	46.4 %	2 mm	1500 x 3000 mm	39.5 kg
Inconel 718	46.4 %	3 mm	1000 x 2000 mm	26.5 kg
Inconel 718	46.4 %	1 mm	1000 x 2000 mm	8.8 kg
Inconel 718	46.4 %	1.50	1000 x 2000 mm	13.1 kg
Inconel 718	46.4 %	2 mm	1000 x 2000 mm	17.7 kg
Inconel 718	46.4 %	2 mm	1000 x 2000 mm	17.6 kg
Inconel 718	46.4 %	1 mm	1000 x 2000 mm	8.8 kg
Inconel 718	46.4 %	1.50 mm	1000 x 2000 mm	13.2 kg
Inconel 718	46.4 %	1.50 mm	1250 x 2500 mm	20.5 kg
Inconel 718	46.4 %	1.50 mm	1500 x 3000 mm	29.6 kg
Inconel 718	46.4 %	2 mm	1000 x 2000 mm	17.6 kg
Inconel 718	46.4 %	2 mm	1250 x 2500 mm	27.2 kg
Inconel X750	46.4 %	2 mm	1500 x 3000 mm	39.4 kg
Inconel X750	46.4 %	2 mm	1000 x 2000 mm	5.9 kg
Inconel X750	46.4 %	3 mm	1000 x 2000 mm	8.9 kg
Inconel X750	35.4 %	8 mm	1000 x 2000 mm	84.9 kg
Inconel X750	35.4 %	8 mm	1250 x 2500 mm	132.9 kg
Inconel X750	35.4 %	10 mm	1000 x 2000 mm	106.1 kg
Inconel X750	51 %	1 mm	1000 x 2000 mm	8 kg
Inconel X750	51 %	1.50 mm	1000 x 2000 mm	12.1 kg
Inconel X750	51 %	2 mm	1000 x 2000 mm	16.1 kg
Inconel X750	51 %	3 mm	1000 x 2000 mm	24.1 kg
Inconel X750	51 %	6 mm	1000 x 2000 mm	49.9 kg
Inconel X750	51 %	6 mm	1250 x 2500 mm	76.8 kg
Inconel X750	51 %	2 mm	1000 x 2000 mm	16.1 kg
Inconel X750	45.2 %	1.50 mm	1000 x 2000 mm	13.4 kg