
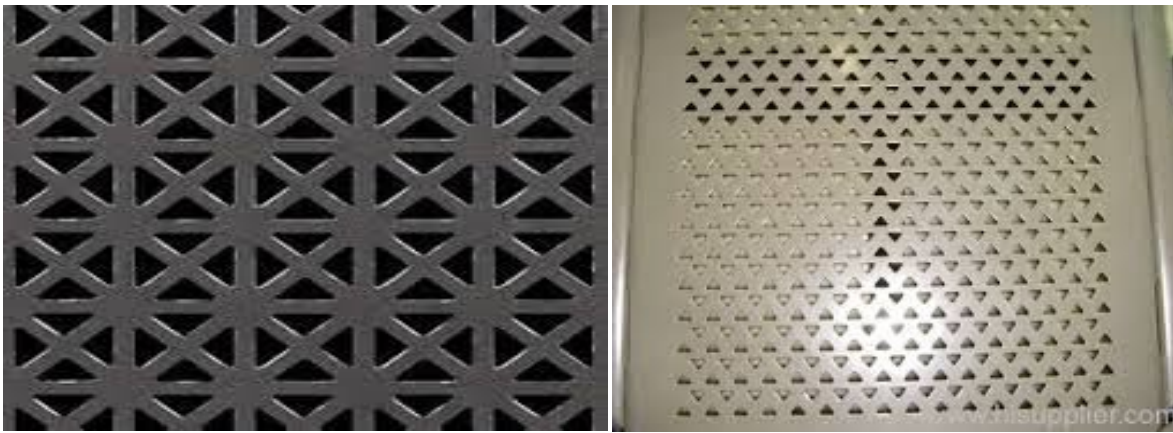


## Triangle Opening Perforated Metal

Heanjia Super-Metals offer a wealth of expertise in triangle opening perforated metal products. From the basic design to the end size of your perforated material, we are here to offer the most optimum solution. We work closely with you from the initial design stages to offer recommendations and expert knowledge ensuring that you receive the best service.

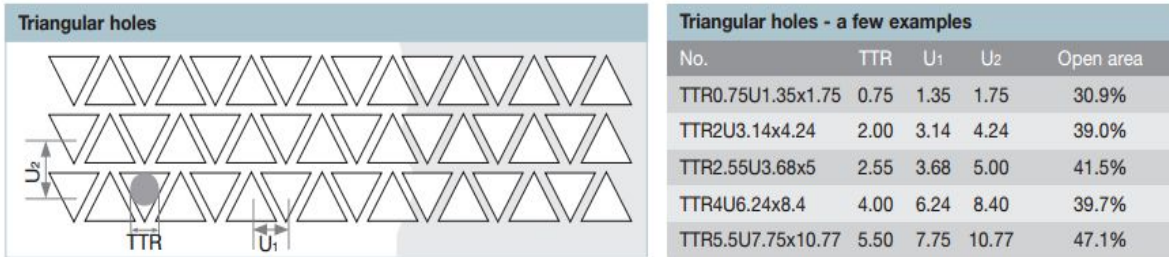

## Triangle Opening Perforated Metal Applications

1. Food processing – trays, strainers, extruding systems, pans
2. Pharmaceutical
3. Power production – input and exit exhaust silencers
4. Filters
5. Guards
6. Sugar processing – centrifuge screens, Mud filter screening and backing screens
7. Architecture and decorative

## Triangle Opening Perforated Metal Stock

Material	Open area	Thickness	Dimension, mm	Weight
SS 304	29.6 %	2 mm	1000 x 2000 mm	22.6 kg
SS 304	29.6 %	3 mm	1000 x 2000 mm	34 kg
SS 304	29.6 %	1.50 mm	1000 x 2000 mm	16.9 kg
SS 304	29.6 %	2 mm	1000 x 2000 mm	22.7 kg
SS 304	29.6 %	0.50 mm	1000 x 2000 mm	5.7 kg
SS 304	29.6 %	0.75 mm	1000 x 2000 mm	8.5 kg

SS 304	53.7 %	1 mm	1000 x 2000 mm	7.2 kg
SS 304	53.7 %	0.70 mm	1000 x 2000 mm	5.1 kg
SS 304	53.7 %	1 mm	1000 x 2000 mm	7.2 kg
SS 304	22.7 %	4 mm	1000 x 2000 mm	50 kg
SS 304	46.3 %	1 mm	1000 x 2000 mm	8.8 kg
SS 310	46.3 %	1.50 mm	1000 x 2000 mm	13.2 kg
SS 310	46.3 %	3 mm	1000 x 2000 mm	26.5 kg
SS 310	46.3 %	1 mm	1000 x 2000 mm	8.8 kg
SS 310	46.3 %	1.50 mm	1000 x 2000 mm	13.2 kg
SS 310	46.3 %	0.75 mm	1000 x 2000 mm	6.5 kg
SS 310	46.3 %	0.80 mm	1250 x 2500 mm	10.9 kg
SS 310	46.3 %	1 mm	1000 x 2000 mm	8.7 kg
SS 310	46.3 %	1 mm	1250 x 2500 mm	13.7 kg
SS 310	46.3 %	1 mm	1500 x 3000 mm	19.6 kg
SS 310	46.3 %	1.50 mm	1000 x 2000 mm	13.0 kg
SS 310	46.3 %	1.50 mm	1250 x 2500 mm	20.5 kg
SS 310	46.3 %	1 mm	1000 x 2000 mm	3 kg
SS 310	37.5 %	2 mm	1000 x 2000 mm	20.2 kg
SS 310	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
SS 310	40.3 %	1.50 mm	1000 x 2000 mm	14.5 kg
SS 310	40.3 %	1.50 mm	1250 x 2500 mm	22.8 kg
SS 310	40.3 %	3 mm	1500 x 3000 mm	65.3 kg
SS 310	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
SS 310	40.3 %	1.50 mm	1000 x 2000 mm	14.6 kg
SS 310	40.3 %	1 mm	1250 x 2500 mm	15.1 kg
SS 310	40.3 %	0.60 mm	1000 x 2000 mm	5.8 kg
SS 310	40.3 %	0.70 mm	1000 x 2000 mm	6.8 kg
SS 310	40.3 %	1 mm	1000 x 2000 mm	9.7 kg
Nickel	40.3 %	1 mm	1250 x 2500 mm	15.2 kg
Nickel	40.3 %	1.50 mm	1000 x 2000 mm	14.5 kg
Nickel	40.3 %	1 mm	1000 x 2000 mm	3.3 kg
Nickel	40.3 %	1.20 mm	1250 x 2500 mm	6.1 kg
Nickel	40.3 %	2 mm	1000 x 2000 mm	6.6 kg
Nickel	35.4 %	0.75 mm	1000 x 2000 mm	7.9 kg
Nickel	35.4 %	1 mm	1000 x 2000 mm	10.4 kg
Nickel	35.4 %	1 mm	1250 x 2500 mm	16.4 kg
Nickel	35.4 %	1 mm	1500 x 3000 mm	23.4 kg
Nickel	35.4 %	1.50 mm	1000 x 2000 mm	15.7 kg
Nickel	35.4 %	1.50 mm	1250 x 2500 mm	24.5 kg
Nickel	35.4 %	1.50 mm	1500 x 3000 mm	35.2 kg
Nickel	35.4 %	2 mm	1000 x 2000 mm	32.7 kg
Nickel	35.4 %	2 mm	1250 x 2500 mm	47.3 kg
Nickel	35.4 %	3 mm	1500 x 3000 mm	33.1 kg
Nickel	35.4 %	3 mm	1250 x 2500 mm	49 kg
Nickel	35.4 %	3 mm	1500 x 3000 mm	70.3 kg
Nickel	35.4 %	4 mm	1000 x 2000	41.1 kg
Nickel	35.4 %	5 mm	1000 x 2000	53.2 kg
Nickel	35.4 %	1 mm	1000 x 2000	10.5 kg
Nickel	35.4 %	1 mm	1250 x 2500	16.3 kg
Nickel	35.4 %	1 mm	1500 x 3000	23.5 kg
Nickel	35.4 %	1.50 mm	1000 x 2000	15.7 kg
Nickel	35.4 %	1.50 mm	1250 x 2500	24.5 kg
Nickel	35.4 %	1.50 mm	1500 x 3000	35.4 kg
Titanium	35.4 %	2 mm	1000 x 2000	20.9 kg
Titanium	35.4 %	2 mm	1250 x 2500	32.7 kg

Titanium	35.4 %	2 mm	1500 x 3000	47 kg
Titanium	35.4 %	3 mm	1000 x 2000	31.8 kg
Titanium	35.4 %	5 mm	1000 x 2000	53.4 kg
Titanium	35.4 %	1.50 mm	1250 x 2500	24.5 kg
Titanium	35.4 %	0.70 mm	1000 x 2000	7.3 kg
Titanium	35.4 %	1 mm	1000 x 2000	10.5 kg
Titanium	35.4 %	1.50 mm	1000 x 2000	15.9 kg
Titanium	35.4 %	2 mm	1000 x 2000	21.2 kg
Titanium	35.4 %	3 mm	1000 x 2000	32.1 kg
Titanium	35.4 %	1 mm	1000 x 2000	10.5 kg
Titanium	35.4 %	1.50 mm	1000 x 2000	15.8 kg
Titanium	35.4 %	0.50 mm	1250 x 2500	8.2 kg
Titanium	35.4 %	0.70 mm	1000 x 2000	7.3 kg
Titanium	35.4 %	0.70 mm	1250 x 2500	11.5 kg
Titanium	35.4 %	0.75 mm	1000 x 2000	7.8 kg
Titanium	35.4 %	0.75 mm	1250 x 2500	12.2 kg
Titanium	35.4 %	1 mm	1000 x 2500	10.4 kg
Titanium	35.4 %	1 mm	1250 x 2500	16.3 kg
Titanium	35.4 %	1 mm	1500 x 3000	23.5 kg
Titanium	35.4 %	1.50 mm	1000 x 2000	15.7 kg
Titanium	35.4 %	2 mm	1000 x 2000	20.9 kg
Titanium	35.4 %	2 mm	1250 x 2500	32.7 kg
Titanium	35.4 %	2 mm	1500 x 3000	47 kg
Titanium	35.4 %	1 mm	1000 x 2000	5.5 kg
Titanium	35.4 %	1 mm	1250 x 2500	7.9 kg
Titanium	35.4 %	1 mm	1500 x 3000	5.3 kg
Titanium	35.4 %	1.50 mm	1000 x 2000	8.3 kg
Titanium	35.4 %	1.50 mm	1250 x 2500	12 kg
Titanium	35.4 %	1.50 mm	1500 x 3000	7.1 kg
Titanium	35.4 %	2 mm	1000 x 2000	11 kg
Titanium	35.4 %	2 mm	1250 x 2500	15.9 kg
Titanium	35.4 %	2 mm	1500 x 3000	10.6 kg